

CISCO-0650

Approved  
P. 8  
2/15/05

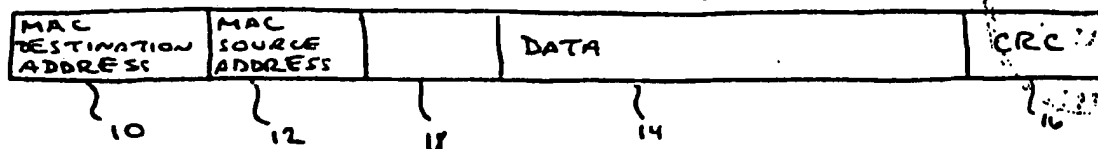


FIG. 1A

(Prior Art)

BEST AVAILABLE COPY

Approved  
PT  
2/15/05

CISCO-0650

Byte 0		Byte 1		Byte 2		Byte 3	
4-bit version	4-bit hd len	TOS value <u>26</u>		13_ len (in bytes)			
16-bit identification				3-bit flags	13-bit fragment offset		
<u>TTL</u>		prot_typ <u>28</u>		.csum			
Source IP address <u>30</u>							
Dest IP address <u>32</u>							
Options (if any)							
Source port number <u>34</u>				Dest port number <u>36</u>			
32 bit sequence number							
32 bit acknowledge number							
4-bit hll	Reserved (6 bits)	u	a	p	r	s	f
		e	c	n	t	y	n
				16 bit window size			
16 bit TCP checksum				16 bit urgent pointer			


TCP only

FIG. 1B

(PRIOR Art)

BEST AVAILABLE COPY

Approved  
PT  
2/15/05

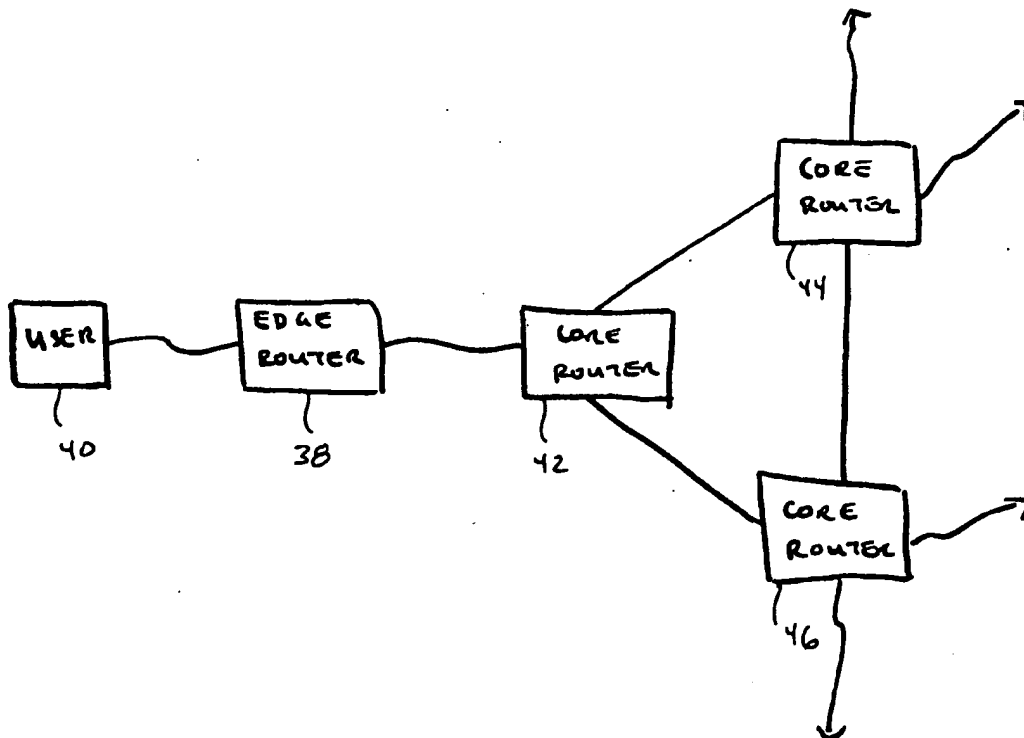

BEST AVAILABLE COPY

FIG. 2

(Prior Art)